

19



Europäisches Patentamt
European Patent Office
Office européen des brevets

11 Publication number:

0 070 571
A2

12

EUROPEAN PATENT APPLICATION

21 Application number: 82106587.7

51 Int. Cl.²: **B 01 L 3/02**

22 Date of filing: 21.07.82

30 Priority: 21.07.81 US 285518
31.08.81 US 297955
31.08.81 US 297956
31.08.81 US 297960

43 Date of publication of application: 26.01.83
Bulletin 83/4

84 Designated Contracting States: **AT BE CH DE FR GB IT**
LI NL SE


71 Applicant: **Scientific Manufacturing Industries Inc.,**
1399 64th Street, Emeryville California (US)

72 Inventor: **Bilbrey, Robert A., 12 Sanborn Road, Orinda**
California (US)
Inventor: **Koball, Bruce R., 6470 Vellejo Street,**
Emeryville California (US)
Inventor: **Loram, John S.H., 806 Camella Street, Berkeley**
California (US)
Inventor: **Eckert, John F., 24 Forest Lane, San Rafael**
California (US)

74 Representative: **Baillie, Iain Cameron et al, c/o Ladas &**
Parry Isartorplatz 5, D-8000 München 2 (DE)

54 Automated liquid dispenser control.

57 An automated liquid dispenser for dispensing reagents or diluting samples with reagent automatically with enhanced accuracy, precision and speed in accord with a programmed local microprocessor or remote computer control.

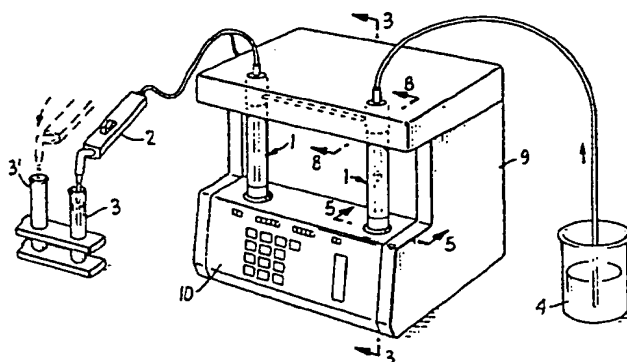

EP 0 070 571 A2

ACTORUM AG

Best Available Copy

- 1 -

AUTOMATED LIQUID DISPENSER CONTROL

0070571

The present invention relates generally to automated liquid dispensers and more particularly to electronic control for a bench-top laboratory instrument which employs one or more easily demountable precision metering syringes reciprocated in response to a programmed microprocessor or computer control for selectively dispensing reagent or diluting samples with reagent and other common normally manual laboratory procedures.

The invention improves the state of the art by providing a precision laboratory instrument which: automates many common normally manual liquid handling laboratory procedures with improved accuracy, precision, speed and reproducibility; is capable of local microprocessor or remote computer control; provides precise servo control for each of a plurality of syringes which is responsive to the syringe piston velocity, direction and position and compensates for mechanical backlash; and discloses a simple valve actuator and control for a plastic valve having planar seating faces which minimizes face wear.

Specifically, the present invention provides an automated liquid dispenser comprising: a frame; at least one demountable precision metering syringe mounted on the frame; a motor driven syringe actuator for each metering syringe; valve means for selectively connecting the cylinder of each metering syringe to one of a sample probe, reagent reservoir, atmosphere or another syringe cylinder; a valve actuator for selecting the position for each valve; and a microprocessor controller for the syringe and valve actuators programed in response to a preselected sequence of operating commands.

The present invention also provides in an automated liquid dispenser having, a frame, at least one precision metering syringe with a precision bored cylinder and a piston carried on a

piston rod reciprocable within the cylinder, valve means for selectively connecting the syringe cylinder to one or more of a set of intake and delivery valve ports and a motor driven syringe actuator on the frame for reciprocating the syringe, an improved quick-release chucking arrangement comprising: a first mounting means on the blind end of the cylinder; clamp means for mechanically clamping the first mounting means and cylinder to the valve means in fluid-tight communication; a second magnetic mounting means on the piston rod external to the cylinder; and permanent magnet means on the syringe actuator for holding the magnetic mounting means securely to the actuator.

The present invention further provides a valve comprising a valve body having a valve seat and ports passing through the surface of the valve seat each for communication with a separate fluid conduit; a valve rotor having a seating face shaped in conformance with the valve seat and seated in fluid-tight contact with the valve seat; a fluid communication groove formed in the seating face of the rotor to communicate selectively a pair of valve ports with one another; and spring bias means pressing the seating face of the rotor into fluid-tight contact with the valve seat.

The present invention also provides in an automated liquid dispenser having at least one metering syringe with a precision bored cylinder and a piston reciprocable within the cylinder, valve means for selectively connecting the syringe cylinder to one or more of a set of intake and delivery valve ports, a syringe actuator having a threaded lead-screw and a lead-screw nut for reciprocating the piston within the syringe cylinder, an improved servo controlled drive means for rotating the lead-screw and lead-screw nut relative to one another comprising: a bi-directional variable speed motor rotating one or the other of the lead-

5 screw and nut; an encoder developing from the motor
rotation a train of pulses each representative of
an increment of piston travel with their repetition
rate representative of piston velocity; a driver
for said motor; a position counter accumulating
the pulses in said encoder pulse train; a micro-
processor for polling the position counter and com-
paring its accumulated count to a predetermined
memory-stored count representative of lengths of
10 piston stroke, and for disabling the motor driver
when the accumulated count in the position counter
reaches the memory-stored count corresponding to
a preselected stroke length.

15 Moreover, the present invention provides
a hand-held probe for manipulating flexible pipette
tubing in an automated liquid dispenser comprising:
a handle having an internal bore; a tube holder
sleeved within the handle bore and itself having
a central bore for receiving the flexible pipette
20 tubing, one end of the tube holder having a reversed
curvature shape adjacent the handle to restrain
movement of the flexible pipette tubing by frictional
engagement of it against the walls of the bore at
the reverse curvature.

25 The objects and advantages of the invention
will become apparent upon consideration of the follow-
ing written description and the accompanying draw-
ings wherein:

30 FIG. 1 is an overall perspective view of
the liquid dispenser with dual syringes;

FIG. 2 is a partial perspective view il-
lustrating a typical metering syringe and the actuator
and valve means for it;

35 FIG. 2A is an elevational view of the po-
sition detector disc configuration shown in FIG. 2;

FIG. 3 is a vertical cross-sectional view
of the instrument taken along line 3-3 of FIG. 1;

FIG. 4 is a plan view of one form of key-
board for the instrument taken along line 4-4 of

FIG. 3.

FIG. 5 is a vertical sectional view of the lead-screw drive for one syringe actuator taken along line 5-5 of FIG. 1;

5 FIG. 6 is a top view of the lead-screw nut and its clamping arrangement taken along line 6-6 of FIG. 5;

FIG. 7 is an exploded view of the internal lead-screw drive for each syringe actuator;

10 FIG. 8 is a vertical sectional view of the valve means for each syringe taken along line 8-8 of FIG. 1;

15 FIG. 9 is a plan view partly in section of the valve means and valve actuator taken along line 9-9 of FIG. 8;

FIG. 10 is a vertical, partially sectional view of the valve means taken along line 10-10 of FIG. 8;

20 FIG. 11 is an exploded view of the valve means and valve actuator for each metering syringe;

FIG. 12 illustrates the valving configuration for a dispenser with two syringes as shown in FIG. 1;

25 FIG. 13 illustrates the valving arrangement for a dispenser with three syringes for example;

FIG. 14 is a vertical sectional view of a small bore syringe used in the instrument;

30 FIG. 15 is a vertical sectional view of a large bore syringe used in the instrument; and

FIG. 16 is an exploded view of the metering syringe components;

FIG. 17 is an overall perspective view of the liquid dispenser with a single syringe;

35 FIG. 18 is an enlarged perspective view of the probe illustrated in FIGS. 1 and 17;

FIG. 19 is a cross-sectional view of the probe showing its internal construction;

FIG. 20 is a cross-sectional view of the probe taken along line 20-20 of FIG. 19; and

FIG. 21 is a schematic block diagram of the microprocessor control and other electronics for the illustrated dispenser.

The instrument illustrated in FIG. 1 is designed for actuation of two precision metering syringes. The invention also is useful in the form of a single syringe shown in FIG. 17 or more than two syringes with appropriate valving and actuator changes which will be apparent from a consideration of the following description.

The illustrated instrument includes one or more precision metering syringes 1 arranged for drawing sample by means of probe 2 from a test tube 3, for example, or for dispensing sample or reagent-diluted sample into test tube 3', shown in hidden lines in FIGS. 1 and 17. The instrument is capable of withdrawing reagent from a reservoir, such as from beaker 4, and then using it to dilute a sample or otherwise to be dispensed from the probe 2.

Each metering syringe 1 mounts upon a syringe actuator, referred to generally as 5, in FIG. 2 at its rod end and is in fluid-tight communication with valve means 6 in FIG. 2. The syringe actuator 5, valve means 6 and its valve actuator, referred to generally as 7, mount upon a rigid frame 8. A housing 9 of chemical resistant material encloses the working components of the instrument apart from the metering syringes which are open for observation and ease of removal and replacement. A keyboard 10 for local microprocessor control mounts on the housing 9 on the front of the instrument adjacent to the metering syringes.

Each metering syringe, as is more particularly shown in FIGS. 14-16, comprises a precision ground glass cylinder 15 and a piston 16 carried on a piston rod 17 reciprocable within the cylinder. A connecting flange and seat 18 seals

upon the blind end of the cylinder. The seat fits within a recess in the valve means 6 that mounts upon the frame 8. The connecting flange 18 is clamped to the valve means 6 by clamp 22 and
5 set-screw 23.

The end of the piston rod 17 remote from piston 16 carries a mounting flange 19 made from magnetic material. In the particular embodiment illustrated, the mounting flange 19 carries
10 on its periphery an o-ring 20 with which to secure to the flange a centering sleeve 21. The centering sleeve, as is more particularly illustrated in FIG. 7, centers the mounting flange 19 upon the end of an externally threaded lead-screw nut
15 25 over which the sleeve fits. The nut 25 carries a permanent magnet 26 which holds the flange 19 of magnetic material firmly to the top of the lead-screw nut centered thereon by sleeve 21. The sleeve 21 sealed by o-ring 20 to mounting flange
20 19 also functions as an open reservoir to contain leaks or provide spill protection should a fragile glass syringe break, or fracture.

The external thread 27 on the lead-screw nut 25 threads upon corresponding threads 28 formed
25 on the internal surface of lead-screw sleeve 29 which is rotatably mounted in ball bearings 30 upon frame 8. The sleeve 29 is rotated by a toothed belt gear 31 and drive belt 32 by servo motor drive means 33 shown in FIG. 2.

The lead-screw nut 25 is restrained from
30 rotation relative to this sleeve 29 by the pair of brackets 34 mounted at one end upon the frame 8 as shown in FIG. 7 and passing through slots 35 formed in the lead-screw nut 25. The brackets are
35 secured at the bottom ends also to the frame 8 by means of a slotted plate 36 which fits over the free end of each bracket and is screwed to the frame as is illustrated in FIG. 5.

The valve means 6 mounted in fluid

communication with the blind end of each metering syringe is more particularly shown in FIGS. 8-11. Each includes a valve body 40 having a generally planar valve seat 41 bored with four ports 42, 43, 44 and 45 as illustrated in FIG. 10. The illustrated ports are in diametrically opposed pairs and each is equidistant from the rotational axis of a mating rotor 46. The spring-loaded rotor 46 has a replaceable seating face 47 having a fluid communication groove 48 on its valving face which communicates pairs of the ports 42, 44 or 43, 45 with one another in a programmed selection sequence by valve actuator means 7. The valve actuator may be a gearhead motor or the illustrated drive motor 49 geared to a drive shaft 50 that is biased by spring 51, ball 52 and sleeve 53 against the rotor 46 to hold the rotor in fluid-tight seating relationship with the valve seat 41. The pin 54 carried on drive shaft 50 mates with a recess 55 in the sleeve 53 and pin 56 on the sleeve mates with recess 57 in rotor 46 to enable the actuator means 7 to rotate the groove 48 into selected communication among the valve port pairs 42, 44 or 43, 45.

The hand-held probe 2 may carry electrical switches for actuating the delivery and aspiration cycles by energizing the valve actuator 7. The probe also may include indicating means showing the instantaneous status of the sequential mode of operation. The probe handle clamps to chemically inert tubing communicating it with the valve means 6 for one or several of the metering syringes. The tubing is bundled with electric conductors connecting the probe switches, microprocessor and valve actuating means.

The particular hand-held probe 2 illustrated in FIGS. 1 and 17 is shown in more detail in FIGS. 18-20. It comprises a handle 60 formed of an elongated bar of tubular or rectangular cross-section material, such as plastic, having a longi-

tudinal circular bore 61 in the embodiment shown.
A tube holder 62 fits within the bore preferably
in an interference fit. The tube holder is gener-
ally tubular in shape with internal bore 63 and
5 at the one end has a goose-neck configuration with
a pair of reverse curves 64, 65. The tube holder
62 ends beyond the goose-neck in a nose portion 66.

The tube holder 62 carries within it
Teflon flexible pipette tubing 67 frequently used
10 in pipetting which communicates with the valve
means 6. The tubing 67 trains through the inter-
nal bore 63 of holder 62. The reverse curves at
64 and 65 provide interference or frictional
engagement of the tubing 67 against the interior
15 walls of the bore 63 and hold the tubing 67 firmly
within tube holder 62 during normal operation. On
the other hand, tubing 67 can easily be replaced
by pulling it out of the tube holder and inserting
another piece of Teflon pipette tubing. The tube
20 holder may be secured within handle 60 by an an-
nular groove 68 around its periphery and a set
screw 69 as shown in FIG. 20. This arrangement
permits the operator to twist the tube holder with-
in handle 60 to provide any 360° orientation for
25 the nose portion 66 as the operator sees fit. The
interference fit holds the selected orientation.

In the probe 2 illustrated in FIGS. 18-20
a pair of pressure switches 71, 72 mount in handle
60 adjacent to a push button 73 pivoted at 74 by the
30 pressure of the thumb 75 of the operator into con-
tact with one or the other of pressure switches
71, 72. Appropriate electrical conductors 76
connect the probe switches 71, 72 to the microproces-
sor and electronic valve actuating means mounted on
35 the dispenser frame. The probe 2 may also include
indicating means such as light emitting diodes 77, 78
to indicate the instantaneous state of the dispenser's
sequential mode of operation. For example, LED 77
may light to indicate that the probe is ready to

dispense sample or reagent and/or LED 78 may light to indicate the probe is ready to draw in sample or reagent.

5 Operation of the illustrated dispenser is automated by a local microprocessor control using keyboard 10. The dispenser operation also can be controlled by a programmed remote computer or a local preprogrammed ROM cartridge for specific dedicated service. The computers control the
10 stroke and speed and sense the instantaneous position of each piston 16 in the metering syringes so that those parameters can be varied upon a command inputted through the keyboard 10 or remote computer interface.

15 Various modes of operation may be selected and preprogrammed into the illustrated microprocessor including the basic liquid transfers of drawing fluid into each syringe from the reagent reservoir, dispensing fluid from the syringe into the reagent
20 reservoir, drawing fluid into the syringe from the sample probe tubing or dispensing fluid from the syringe into the sample probe tubing. Various modes of operation are obtainable including a dispense mode wherein a measured volume of liquid is drawn
25 into a syringe from the reagent reservoir and then dispensed. In a pipette/dilute mode a measured volume of liquid is drawn from the reagent reservoir and then one or more separate samples are aspirated into the sample probe tubing with air
30 gaps separating one sample from another and from the reagent. Then the total content of the syringe may be dispensed back out through the sample probe tubing. Various wash, purge and other modes can also be programmed into the microprocessor.

35 The microprocessor and electronic control for the described dispenser is illustrated schematically in FIG. 21. It includes microprocessor 80 with power supply 81. A bi-directional system bus 82 interconnects the microprocessor 80 with

a random access memory 83, a programmed memory 84, bit input-output circuitry 85 for the probe switches, valve actuator and syringe actuator and interconnects an internal timer 86. A hybrid
5 servo control circuit 87 is provided for each syringe motor 33. Keyboard-display interface circuitry 88 connects the keyboard and display 10 to the microprocessor 80 and has audible alarm 89. The system bus 82 also may interconnect the
10 microprocessor 80 with a universal synchronous/asynchronous receiver transmitter (USART) and interface circuit 90 for connection with other devices such as an external computer control or perhaps a local preprogrammed cartridge memory
15 for dedicated service.

The foregoing components are generally available chips for various applications and in one embodiment of the system include:

microprocessor (80)	Intel 8085
20 RAM(83), bit I/o (85)	Intel 8156
and timer (86)	
ROM (84)	Intel 2716 or 2732
keyboard/display (88)	Intel 8279
USART (90)	Intel 8251A with
25	RS232C interface

Each servo control circuit 87 is responsive to syringe piston velocity, direction and position and accurately positions, relative to one another, the lead-screw nut 25 and lead-screw sleeve
30 29 which drive each piston rod 17 as illustrated in FIG. 5. The hybrid servo system shown in FIG. 21 includes the bi-directional variable speed DC servo motor 33 shown in FIGS. 2, 3. A shaft encoder 91, which by reference to FIG. 2, includes
35 slotted disc 92 on the motor shaft and a pair of optoelectric sensing means 93,94 arranged in phase quadrature that sense the presence of the one-hundred-fifty-five equally spaced slots 95 on disc 92. Each opto-electric sensing means can be

a light coupled LED and a corresponding photo-transistor, for example, to digitally encode syringe piston position, direction of movement and velocity as the rotating disc 92 interrupts the coupling. The encoder 91 supplies two trains of pulses in phase quadrature to tachometer converter 96 to control velocity and direction of motor rotation. The encoder 91 also supplies the pulses to position counter 97. It accumulates the pulse count the total of which is representative of the instantaneous piston location from a "home" position. The tachometer converter 96 and a velocity control DAC 99 each supply an analog output to error amplifier 98 which operates in velocity or position mode. Its output adjusts velocity and position by driving a pulse-width modulation motor driver 99 for the variable speed DC motor 33.

The microprocessor 80 controls the hybrid servo 87 with eight output lines and receives information from the servo with five input lines. Five of the microprocessor output lines at 100 comprise a five-bit velocity command to DAC 99 of the servo with converts this command to a command analog current. The other output line at 100 selects the sign of the velocity command to control polarity of the motor driver 99 and, thus, the direction of motor rotation. Another output line at 101 selects the velocity or position mode for servo operation. Another output line, not shown, acts as a chip enable for the servo motor driver 99. Four of the input lines at 102 comprise a four-bit position word input to the microprocessor from the position counter 97. A fifth microprocessor input line 103 is the home position sensor input which indicates that the syringe piston 16 is at "zero" volume or its "home" position within cylinder 15.

The hybrid servo system can operate in

two modes, i.e., a velocity mode or position mode. The servo starts out in velocity mode as the microprocessor outputs an increasingly larger five-bit velocity command word to the velocity digital-to-analog converter 99 along with a directional sign bit at 100. The time between successive velocity commands is variable to provide a variable acceleration characteristic in the converter output voltage. This parameter is keyed to various other system parameters such as currently programmed speed, current syringe size, probe tip size and fluid viscosity. The servo responds by accelerating syringe motor 33 to the commanded velocity and in the programmed direction.

While the motor 33 is in motion the position counter 97 accumulates counts and is periodically polled by the microprocessor 80. In this way the microprocessor keeps track of the instantaneous position of the piston 16, lead screw nut 25 and sleeve 29. As components approach their desired destination, the microprocessor causes the syringe motor 33 to decelerate by outputting successively smaller command words to DAC 99. The point at which each command outputs is determined by a variable lookup table in the software. Each entry in the table represents the number of position counts remaining in the current stroke and the position in the table represents the velocity DAC command appropriate for that number of counts to be sent to DAC 99. The microprocessor periodically compares the number of counts remaining with the table entry for the current velocity DAC command. If the table entry is less than the current number of counts remaining, the velocity DAC command is not changed. If the table entry is greater than or equal to the number of position counts remaining, the velocity DAC word is decremented by one and a comparison is made with the next table entry until one is found which is less than the number of

counts. This process is then repeated until the piston terminal is reached. This strategy controls piston velocity to optimize liquid delivery performance by minimizing undesirable effects such as liquid cavitation, frothing, splashing and de-naturation.

When the piston and lead-screw elements reach their desired position the microprocessor outputs a zero velocity word and switches the servo to position mode. This stops the syringe motor and locks it in place with an electronic detenting action. Should the encoder 91 supply a pulse to tachometer converter 96 in this position mode, error amplifier 98 is directed to supply a counter-
ing output to hold the piston position.

Mechanical system backlash which can occur between the lead screw nut 25 and sleeve 29 or in the drive belt 32 or between syringe piston rod 17 and Teflon syringe tip and thereby cause im-precision and inaccuracy, is taken out of the system by the microprocessor 80 which adds a small amount of piston travel to every downward displacement of the piston and returns up the same amount as the piston moves upward to the end of the piston motion or "home" position to which the piston is always returned. Thus, the servo control always approaches its final home destination moving in the "up" direction to subtract any backlash and thus prevent it from affecting system precision and accuracy.

The "soft home" detector 104 for the described dispenser includes another optically-coupled LED-phototransistor sensor 112 shown in FIGS. 6,7 which has its optical coupling interrupted by flag 113 mounted upon a flexure 114 secured to the frame 8 at the "soft home" position when abutment screw 115 on the lead-screw nut 25 moves the flag 113 upwardly to interrupt the optical coupling. The screw 115 permits adjustment

of a precise "soft home" position short of the absolute or "hard" end of the piston stroke.

5 The valve motor 49 may be a permanent magnet synchronous motor driven in one direction with AC current from a secondary winding of the power transformer in power supply 81. It is controlled by the microprocessor 80 through optoelectric valve position encoder 105 and a triac. The valve position encoder 105 consists of a pair of sensors that are optically-coupled light emitting diodes and phototransducers 106 shown in FIGS. 2 and 3. They sense the presence of one of two differently positioned sets of slots 107, 108 on disc 109 that is attached to the drive shaft 50 for valve rotor 46. One set of slots is on the disc periphery in one diametrically opposed pair, as at 107 shown in FIG. 2A, and represents the valve position with groove 48 communicating ports 43,45. The other set is cut inwardly from the disc edge in a diametrically opposed pair 108 to represent the port 42,44 position of the groove. The coupled light between the paired LED and phototransistor sensors 106 detects the valve position, with groove 48 communicating one or the other pairs of ports 43,45 or 42,44. The position information is fed to the valve controller 106 that interfaces with microprocessor 80. To switch the position of the valve groove 48, the microprocessor 80 turns on valve motor 49, which rotates the valve rotor 46 in one direction, and then polls the status of the valve position detector until the desired valve position is reached.

35 In reference to the keyboard 10 of FIG. 4 the operator initially presses the mode key and then may select one of the modes on the other keys by pressing for example, the dispense, pipette, transfer, etc. key to select the desired mode. If the dispense mode has been selected, the letters

DP appear in the "mode" display and the current value for the amount of reagent to be dispensed appears in the "reagent" display. The operator may press the "enter" button to accept the displayed reagent quantity or enter a new value in RAM 83 by depressing appropriate numeric keys and then entering its value which also appears on the "reagent" display. Upon entering the new value, the indicator LED 78 for intake on the probe 2 is energized and the displayed amount of reagent then can be drawn into the syringe by pressing the push button 73 on the probe to actuate switch 72.

The microprocessor then enables the syringe motor 33 in the down stroke direction. Its speed is accelerated in accord with the program stored in ROM 84 relative to instantaneous stroke position accumulated in position counter 97. The measured volume of reagent is drawn into the syringe from the reagent vessel 4. The microprocessor decelerates and then stops the motor 33 at the selected stroke volume. The dispense LED 77 lights and depression of push button 73 to actuate switch 71 dispenses reagent to pipette tubing 67 at probe 2 with the piston 16 returning to the soft home position. The microprocessor disables the motor drive when that position is detected by the soft home detector 104.

Corresponding positioning of valve rotor 46 is accomplished by the microprocessor to switch the fluid communicating groove 48 for example, to the intake position shown for the right-hand syringe of FIG. 12 to connect the syringe port 43 with reagent intake port 45 to draw reagent into the syringe. At the bottom end of the stroke valve motor 49 switches the groove 48 to communicate

the syringe discharge port 42 to port 44 communicating with pipette tubing 67 as is shown in FIG. 13 for the right-hand syringe.

5 The pipette and other modes can be similarly entered in the keyboard to draw in reagent as previously described. In pipette mode the operator selects a volume for each of the reagent and the desired number of samples by depressing the appropriate mode and digit keys and enters those
10 values which appear in the reagent and sample displays along with a numeral to identify each particular sample. The microprocessor enables the motor drive 99, the syringe draws in the entered amount of reagent and stops. The valve switches
15 to dispense position and the piston moves down to draw an air gap into the end of tubing 67 from atmosphere to separate reagent from the first sample and the valve returns to intake position. The operator then places the probe in the sample
20 reservoir, depresses the button 72,73 to draw sample into the probe. The operator repeats the sample take up for others that may be entered on the keyboard each time with an air gap between them. The operator then places the probe in position
25 to dispense the entire contents of the pipette tubing and depresses the dispense button 71 to do so as described above.

Various modifications of the described dispenser microprocessor and control electronics
30 will become apparent to those skilled in the art within the scope of the invention that is defined in the following claims.

CLAIMS

1. An automated liquid dispenser comprising: a frame; at least one demountable precision metering syringe mounted on the frame; a
5 motor driven syringe actuator for each metering syringe; valve means for selectively connecting the cylinder of each metering syringe to one of a sample probe, reagent reservoir, atmosphere or another syringe cylinder; a valve actuator for selecting the
10 position for each valve; and a microprocessor controller for the syringe and valve actuators programmed in response to a preselected sequence of operating commands.

2. In an automated liquid dispenser having,
15 a frame, at least one precision metering syringe with a precision bored cylinder and a piston carried on a piston rod reciprocable within the cylinder, valve means for selectively connecting the syringe cylinder to one or more of a set of intake and delivery
20 valve ports and a motor driven syringe actuator on the frame for reciprocating the syringe, an improved quick-release chucking arrangement comprising: a first mounting means on the blind end of the cylinder; clamp means for mechanically clamping the first
25 mounting means and cylinder to the valve means in fluid-tight communication; a second magnetic mounting means on the piston rod external to the cylinder; and permanent magnet means on the syringe actuator for holding the magnetic mounting means securely
30 to the actuator.

3. The liquid dispenser of Claim 2, wherein the magnetic mounting means is a flange having the same diameter as the syringe actuator abutting it and further comprising a centering tube sleeved
35 over the flange and the abutting portion of the syringe actuator.

4. The liquid dispenser of Claim 2 or 3, wherein the syringe actuator comprises: an internally threaded lead-screw sleeve rotatably mounted on

the dispenser frame; drive means for rotating the lead-screw sleeve; an externally threaded lead-screw nut within the sleeve for seating the rod end of the syringe; and clamp means on the frame restraining the lead-screw nut from rotation with respect to the sleeve.

5 5. A valve comprising: a valve body having a valve seat and ports passing through the surface of the valve seat each for communication with a
10 separate fluid conduit; a valve rotor having a seating face shaped in conformance with the valve seat and seated in fluid-tight contact with the valve seat; a
15 fluid communication groove formed in the seating face of the rotor to communicate selectively a pair of
valve ports with one another; and spring bias means pressing the seating face of the rotor into fluid-tight contact with the valve seat.

20 6. The valve of Claim 4, further comprising valve actuator means for stepping the rotor from one set of port communication positions to another.

 7. The valve of Claim 4 wherein the ports are arranged in diametrically opposed pairs and each port is equidistant from the rotational axis of the rotor.

25 8. In an automated liquid dispenser having at least one metering syringe with a precision bored cylinder and a piston reciprocable within the cylinder, valve means for selectively connecting the syringe cylinder to one or more of a set of intake and
30 delivery valve ports, a syringe actuator having a threaded lead-screw and a lead-screw nut for reciprocating the piston within the syringe cylinder, improved servo controlled drive means for rotating the lead-screw and lead-screw nut relative to one another comprising:
35 a bi-directional variable speed motor rotating one or the other of the lead-screw and nut; an encoder developing from the motor rotation a train of pulses each representative of an increment of piston travel with their repetition rate representative of piston

velocity; a driver for said motor; a position counter accumulating the pulses in said encoder pulse train; a microprocessor for polling the position counter and comparing its accumulated count to a predetermined memory-stored count representative of lengths of piston stroke, and for disabling the motor driver when the accumulated count in the position counter reaches the memory-stored count corresponding to a preselected stroke length.

9. The liquid dispenser of Claim 8, further comprising: an error amplifier for supplying a variable velocity control signal to the driver for said motor; a tachometer converting the pulse train from the encoder to an analog voltage proportional to velocity of piston travel that is supplied to the error amplifier; a digital-to-analog converter also outputting an analog voltage to the error amplifier; and a microprocessor supplying a velocity command signal to the digital-to-analog converter in accord with memory-stored values relative to stroke end to cause an increase in converter output voltage during a preselected acceleration portion and a decrease in converter output voltage during a preselected deceleration portion of the piston stroke.

10. The liquid dispenser of Claim 9, wherein the microprocessor periodically polls the position counter to ascertain the instantaneous position of the piston in its stroke, compares that count with the number of counts remaining in a preselected length of stroke for the piston and then outputs a velocity control command to the digital-to-analog converter corresponding to that position.

11. The liquid dispenser of Claim 8, 9, or 10, further comprising: a valve position encoder that supplies a position signal to the microprocessor representative of the position of the intake and delivery valve ports; and wherein the microprocessor in coordination with reciprocation of the syringe piston switches the valve position in a memory-

stored sequence.

12. The liquid dispenser of Claim 9,
wherein a soft home detector senses piston arrival
at a home position near one end of the piston
5 stroke and causes the microprocessor to disable the
motor driver upon the piston arrival at the home
position.

13. The automated liquid dispenser of
Claim 9, wherein the microprocessor at the terminal
10 end of each piston displacement switches the error
amplifier to position mode to output a corrective
signal to the motor driver upon receipt of any sig-
nal from the tachometer converter.

14. The liquid dispenser of any of Claims
15 8 to 13, wherein the microprocessor adds an in-
crement of piston travel for every piston displace-
ment away from a home position and subtracts that
increment as the piston returns to said home posi-
tion.

15. A hand-held probe for manipulating
20 flexible pipette tubing in an automated liquid dis-
penser comprising: a handle having an internal bore;
and a tube holder sleeved within the handle bore
and itself having a central bore for receiving the
25 flexible pipette tubing, one end of the tube holder
having a reversed curvature shape adjacent the handle
to restrain movement of the flexible pipette tubing
by frictional engagement of it against the walls of
the bore at the reverse curvature.

16. The probe of Claim 15 wherein the tube
30 holder is rotatable in the handle bore with an
interference fit for orientation of the reversed
curvature as desired by the operator with respect
to the handle.

17. The probe of Claim 16, wherein the
35 tube holder has an annular groove and receives a
set screw mounted on the handle to secure the tube
holder within the handle.

18. The probe of Claim 15, 16, or 17,

5 further comprising: at least one pressure switch mounted on the handle; and push button means for selectively actuating the pressure switch by manipulation of the operator's thumb of the hand which grips the probe.

19. The probe of Claim 15, 16, 17 or 18, further comprising at least one indicating means for showing the state of the mode of operation of the dispenser.

1/9

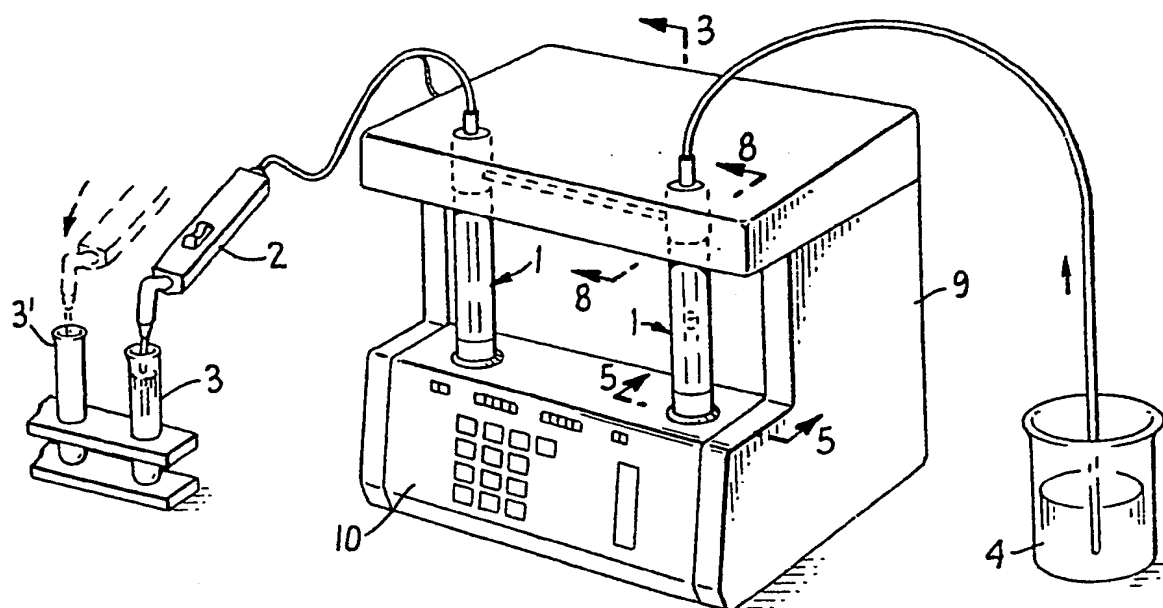


FIG. 1.

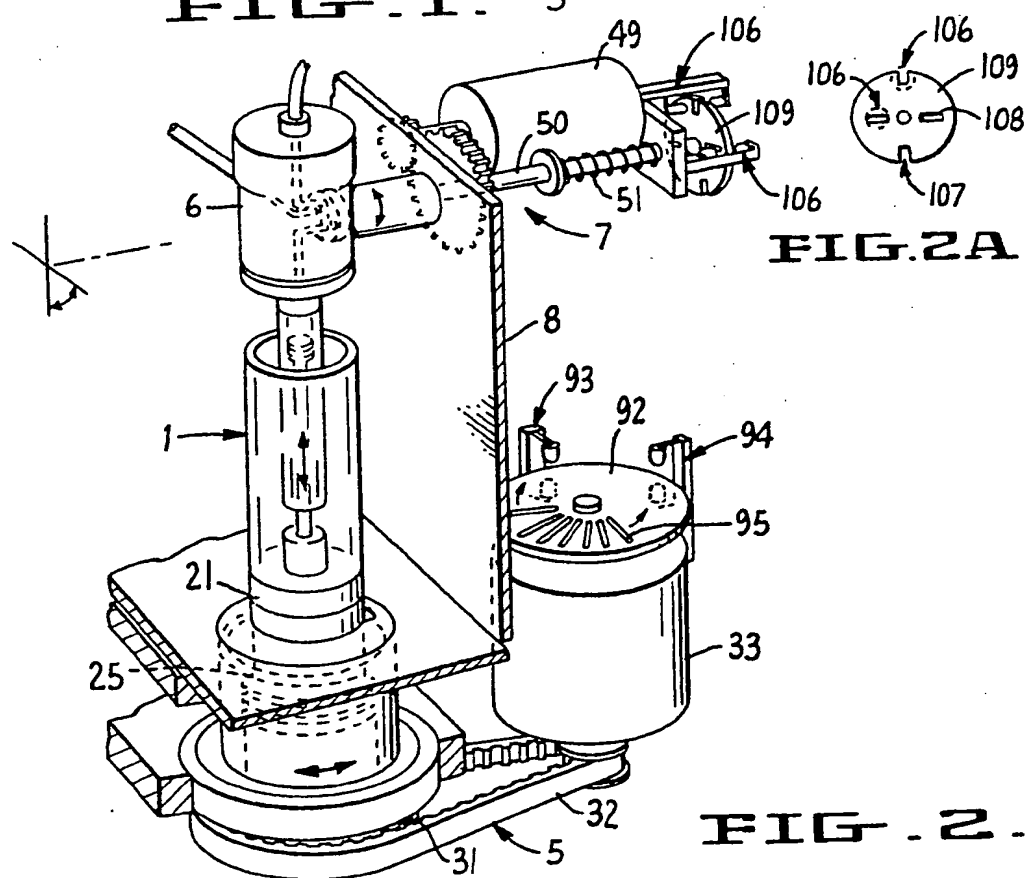


FIG. 2.

FIG. 3.

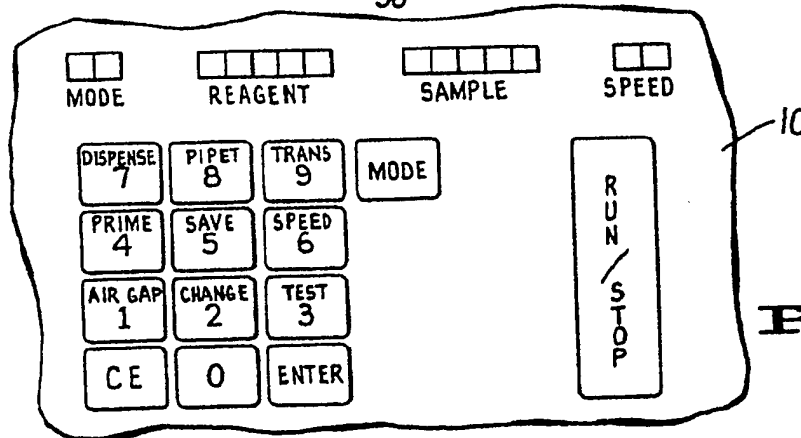
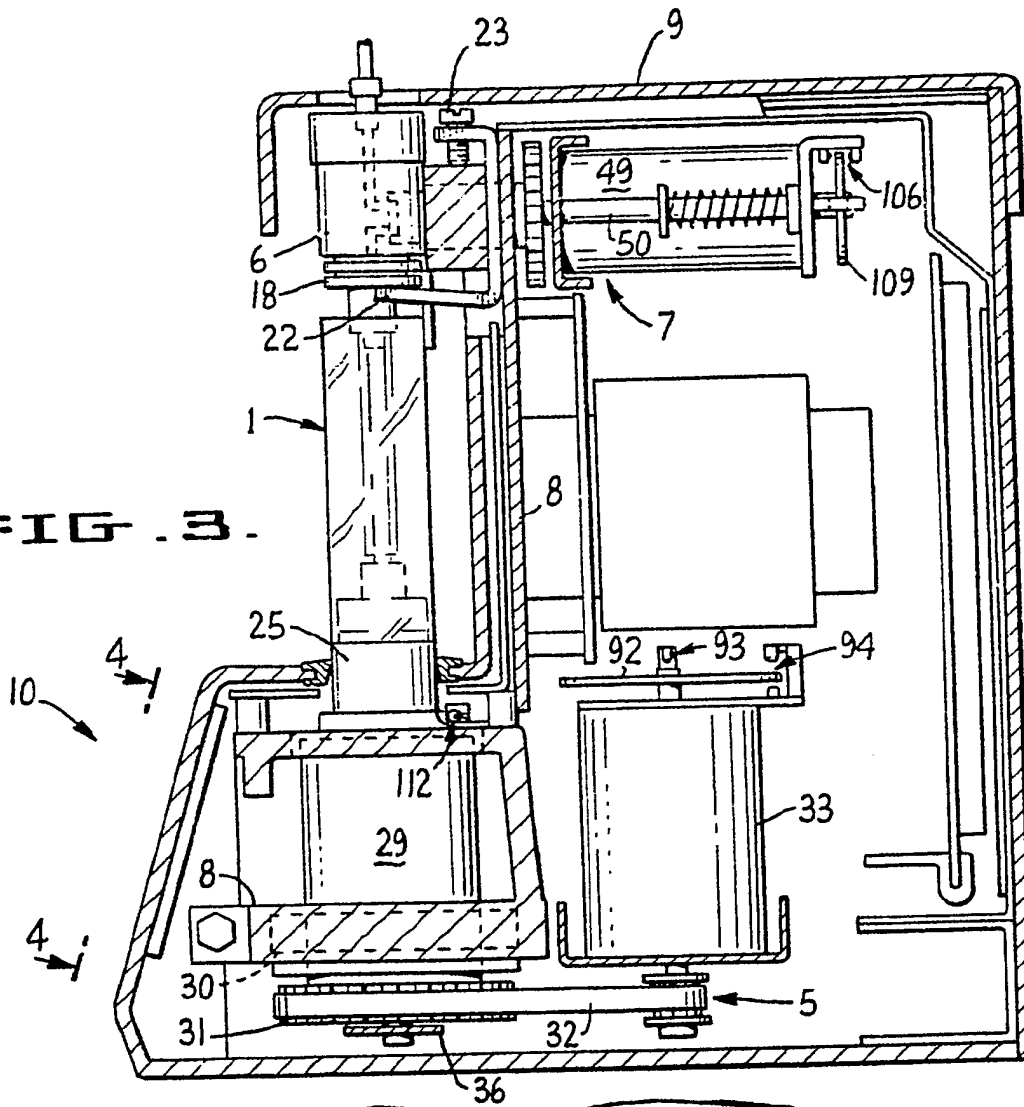


FIG. 4.

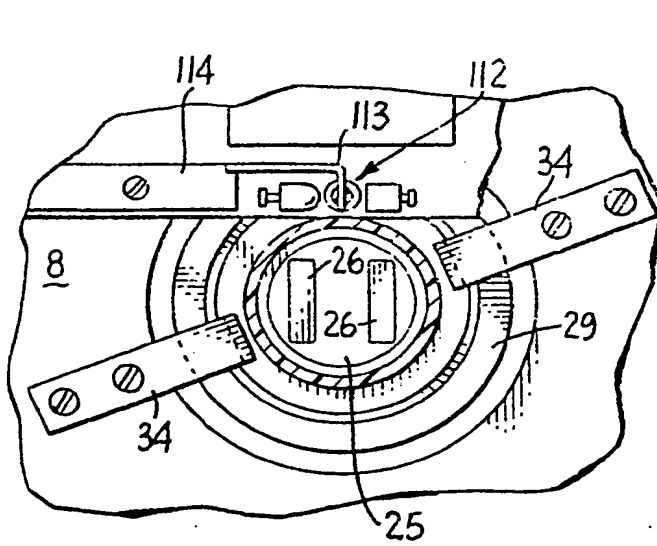


FIG. 6.

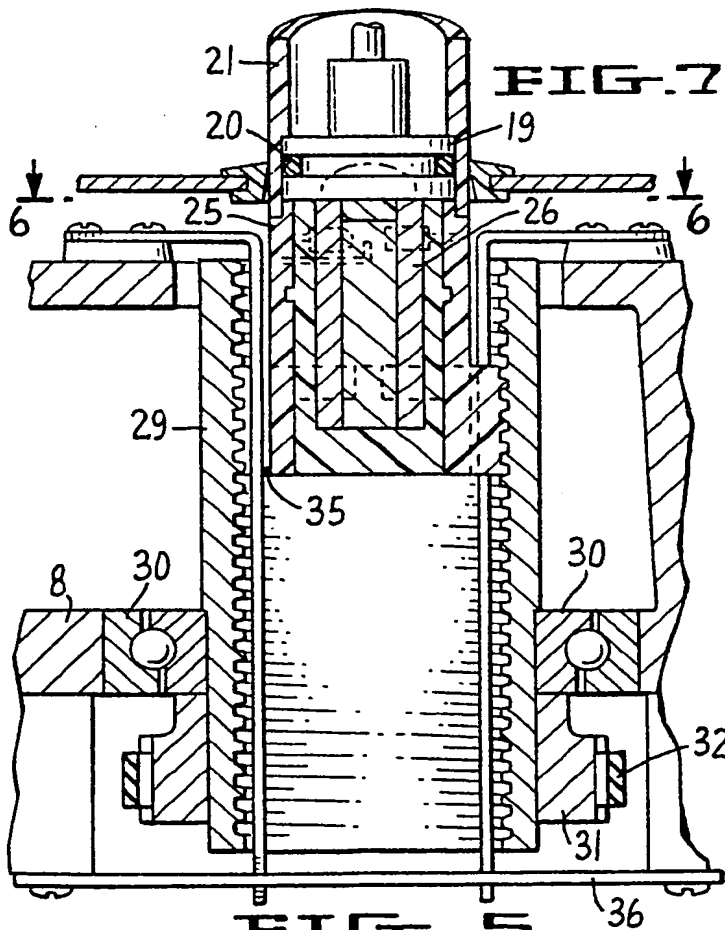


FIG. 5.

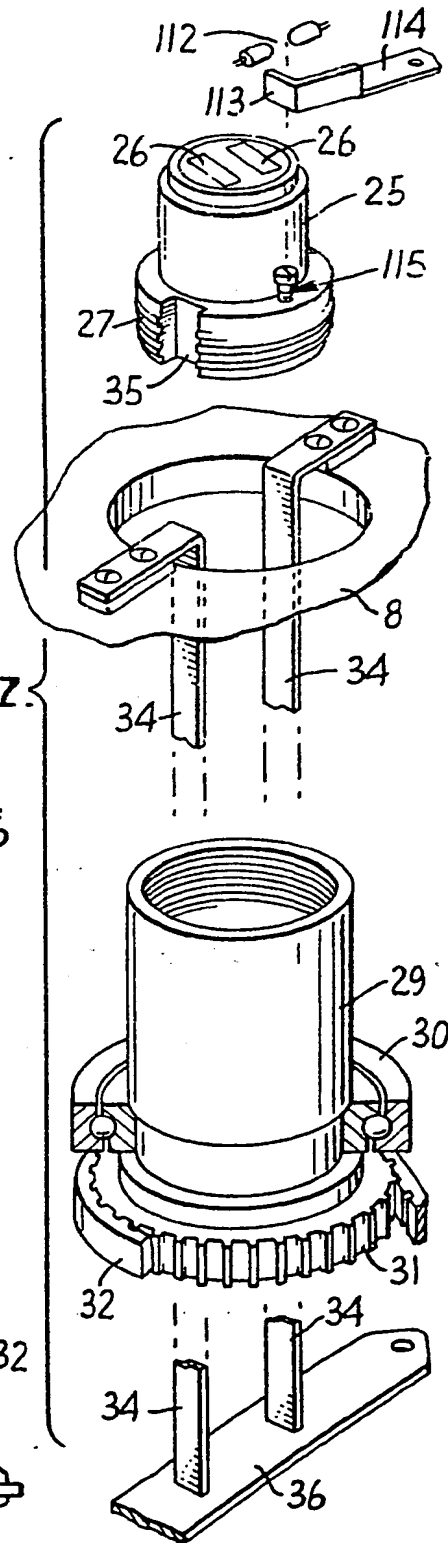
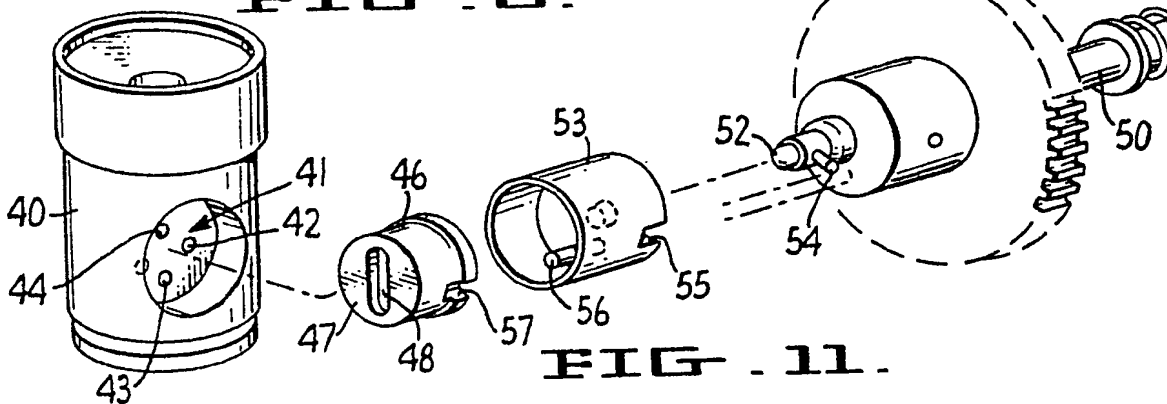
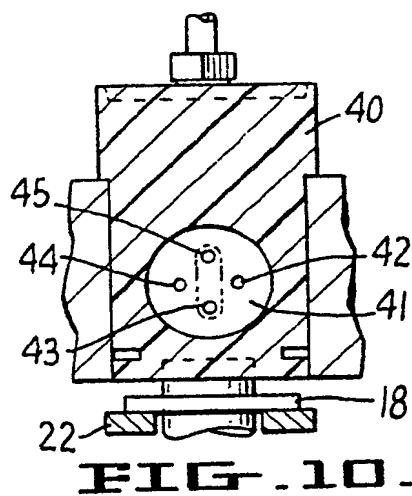
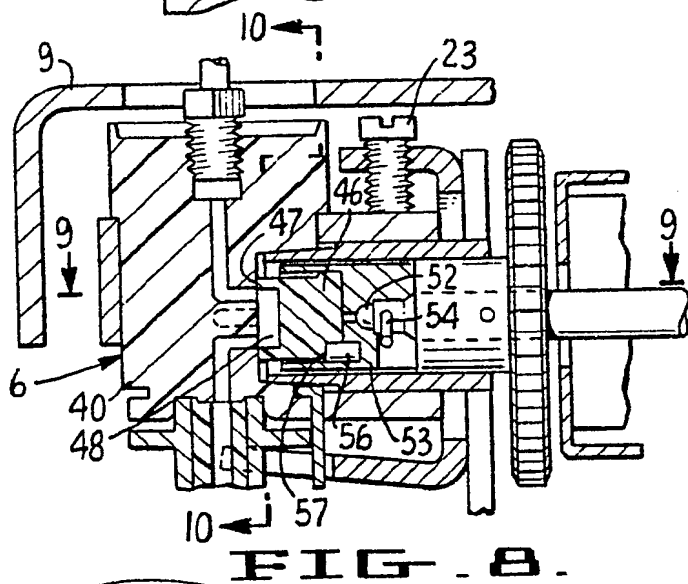
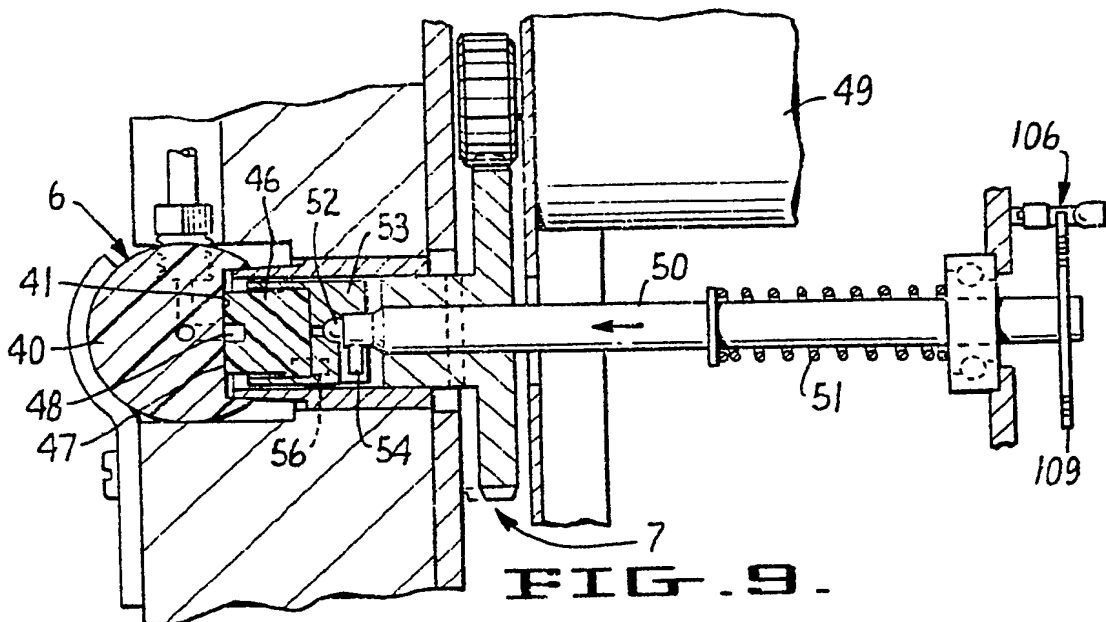


FIG. 7.



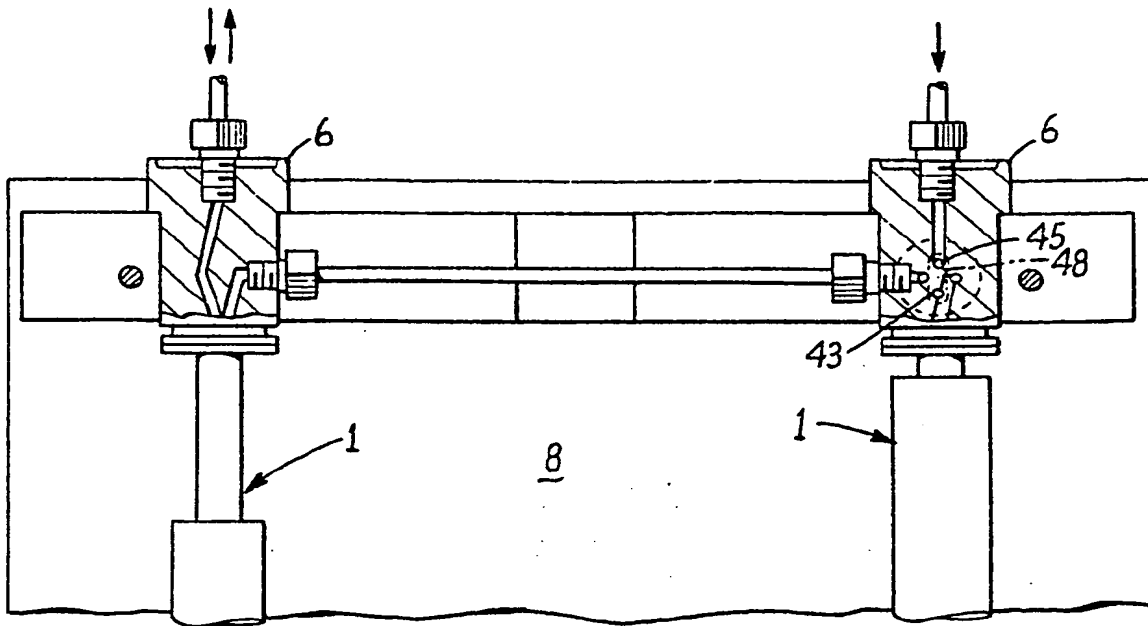


FIG. 12.

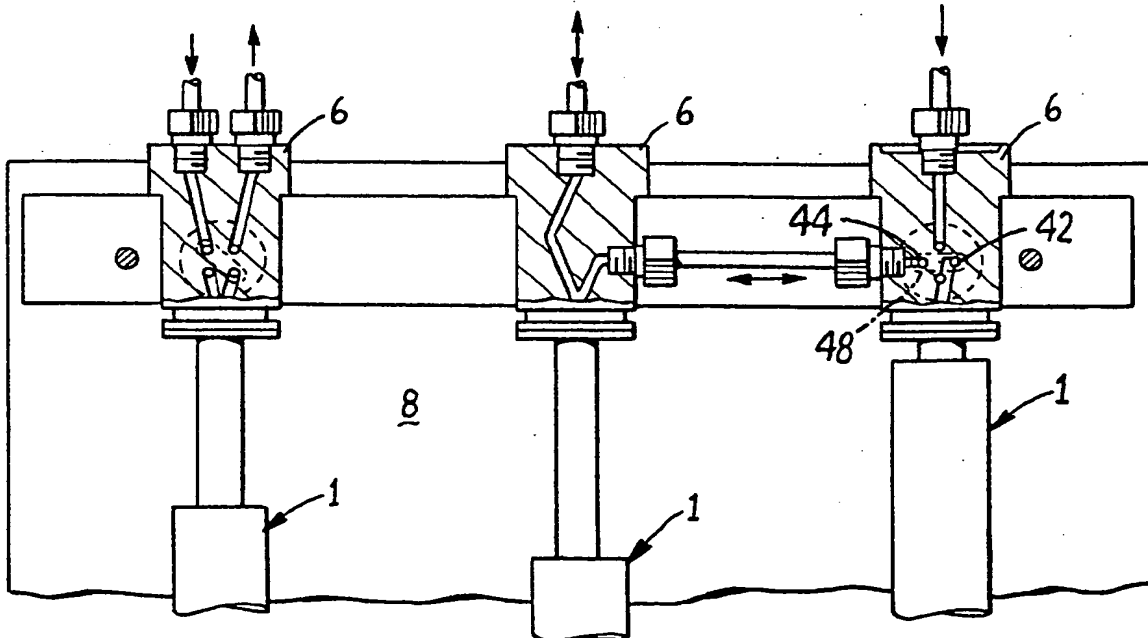


FIG. 13.

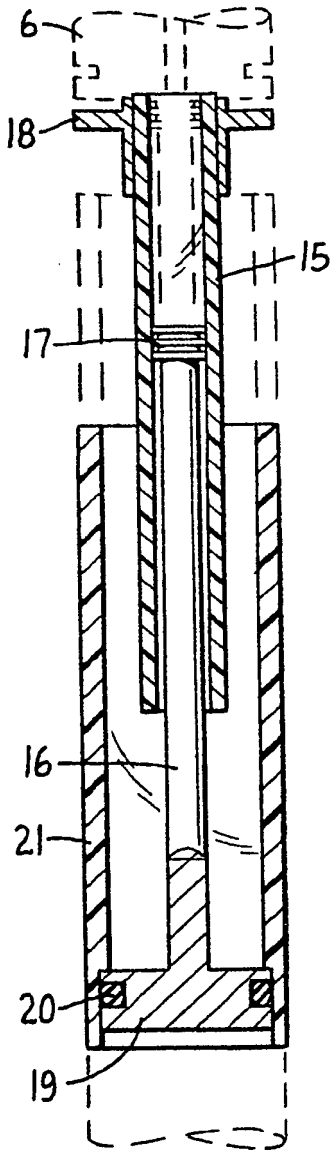


FIG. 14.

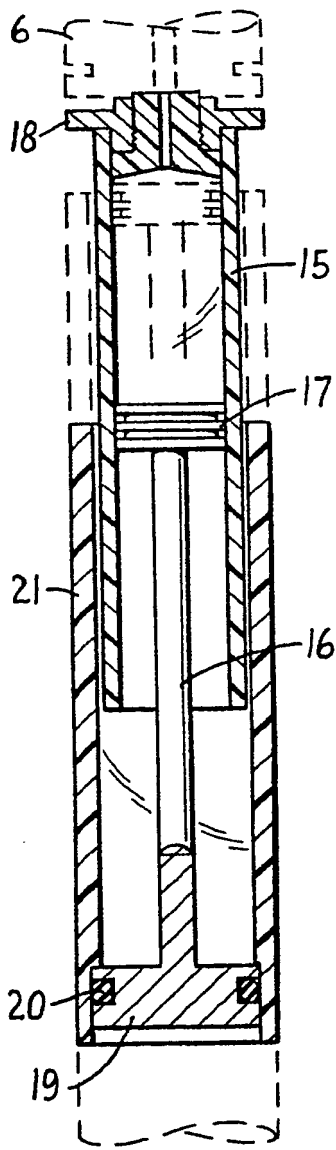
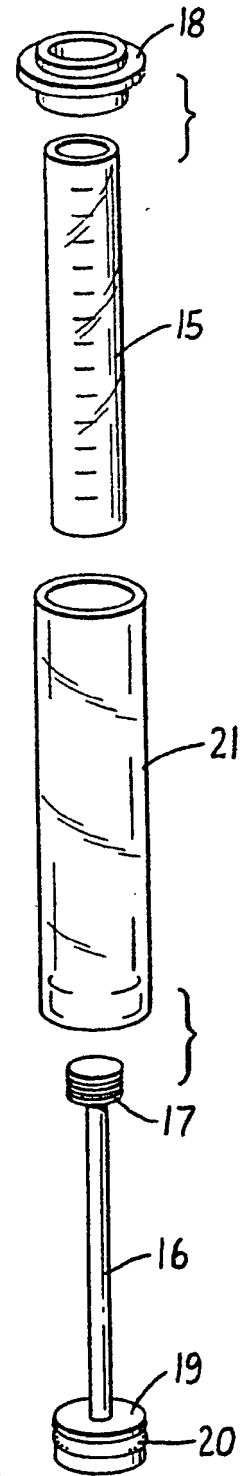


FIG. 15



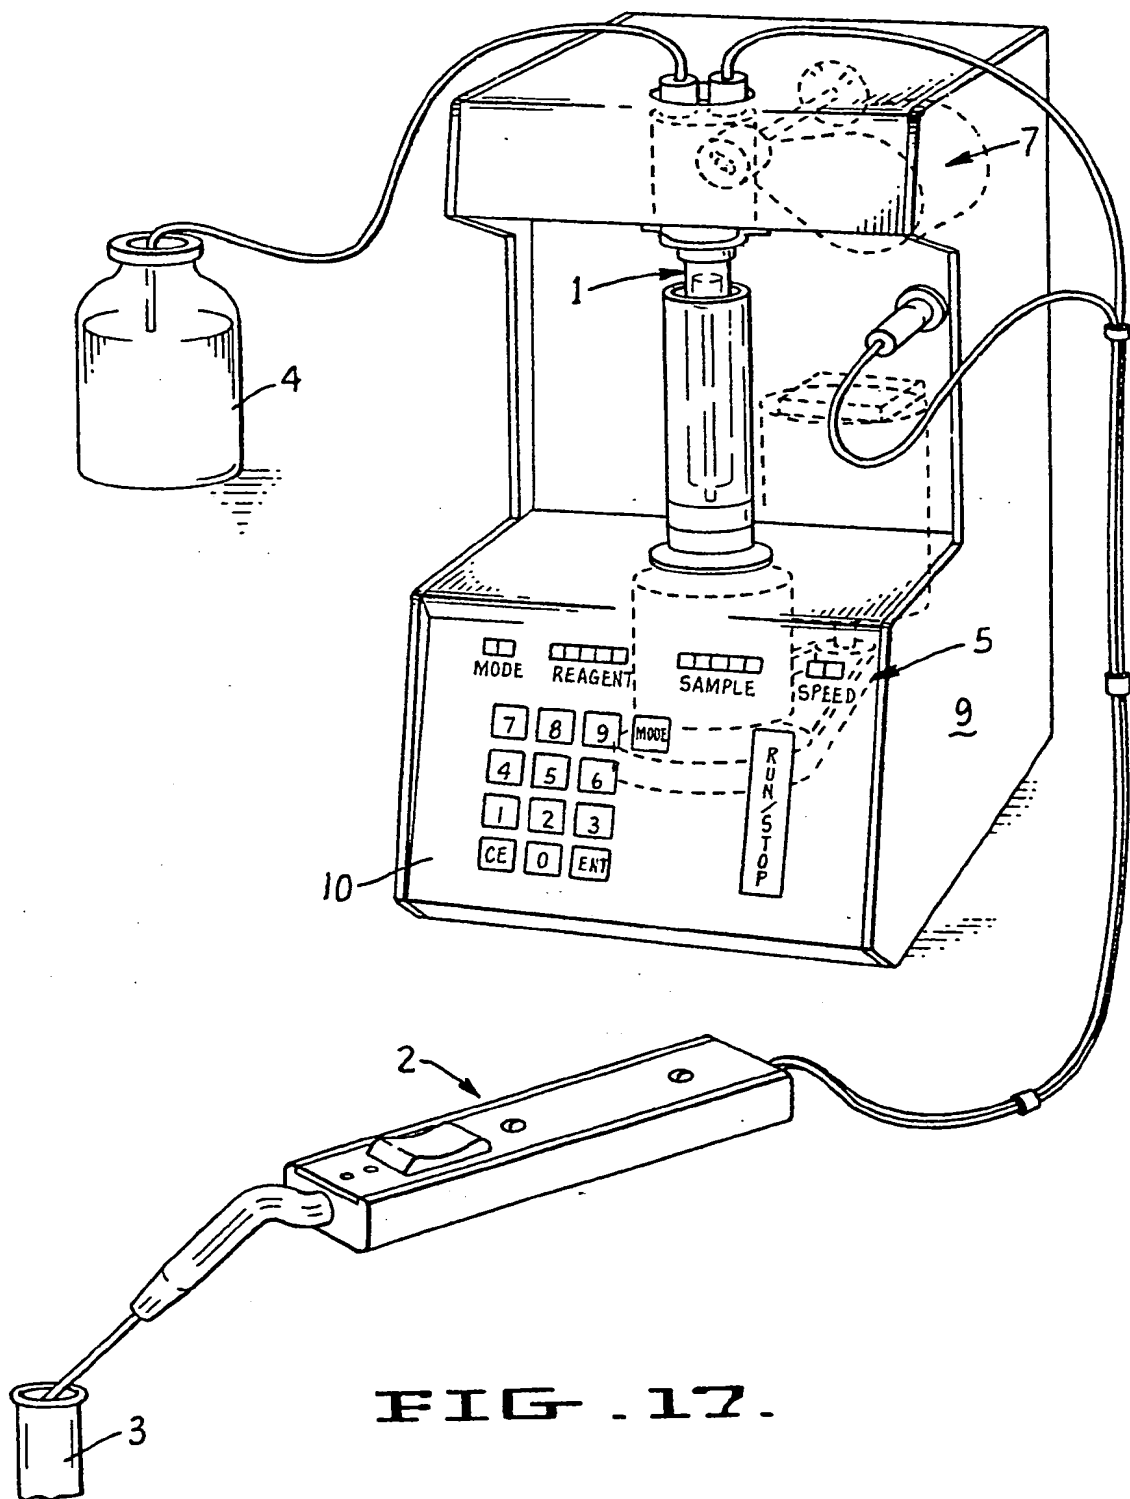
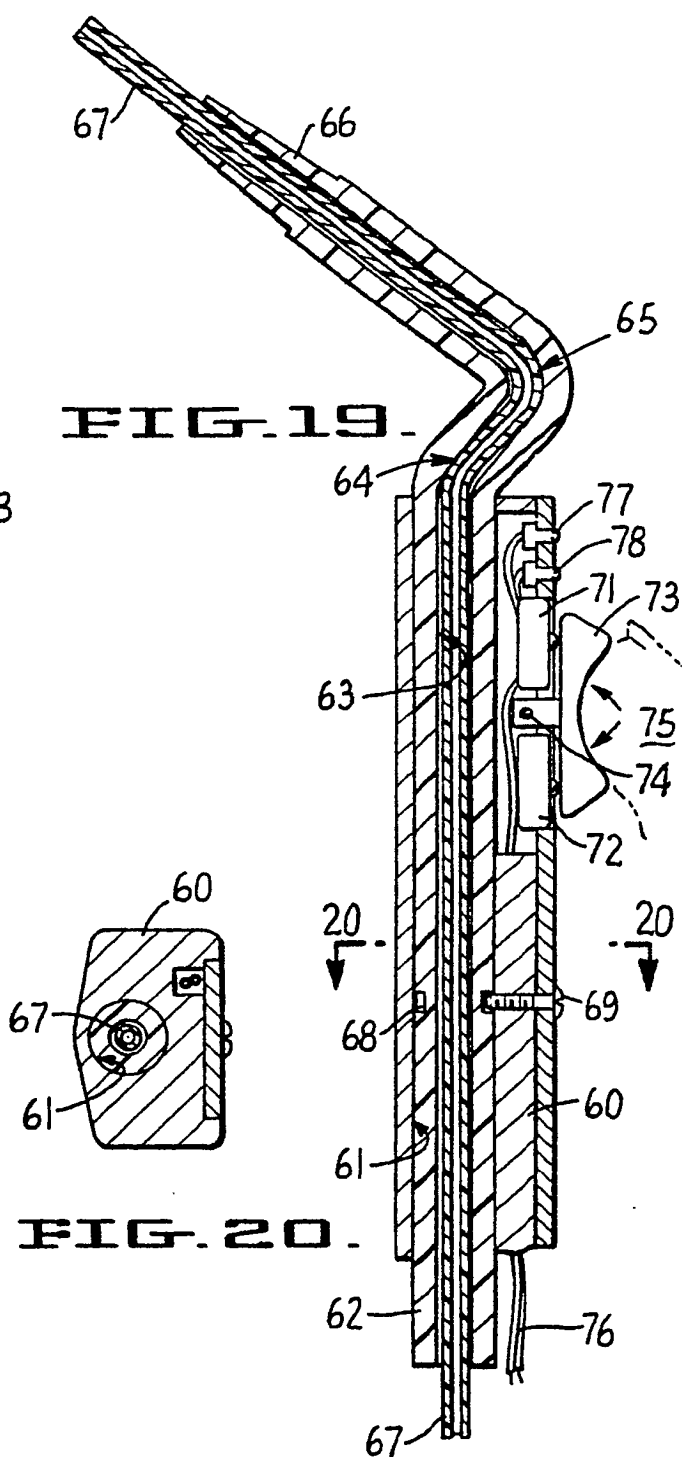
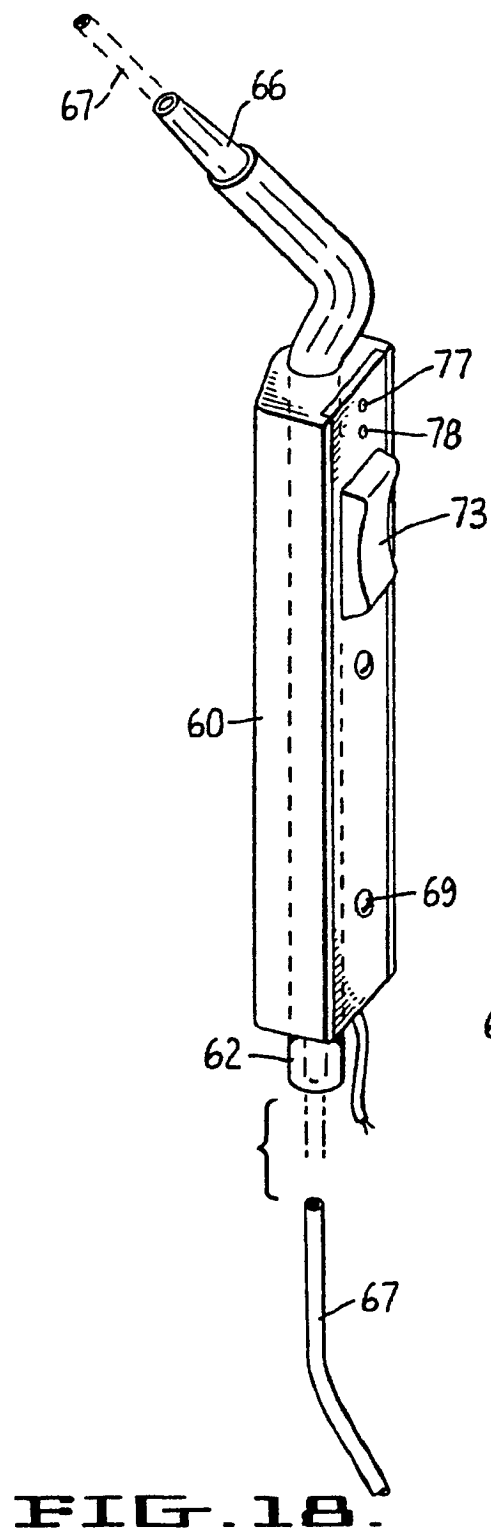


FIG. 17.



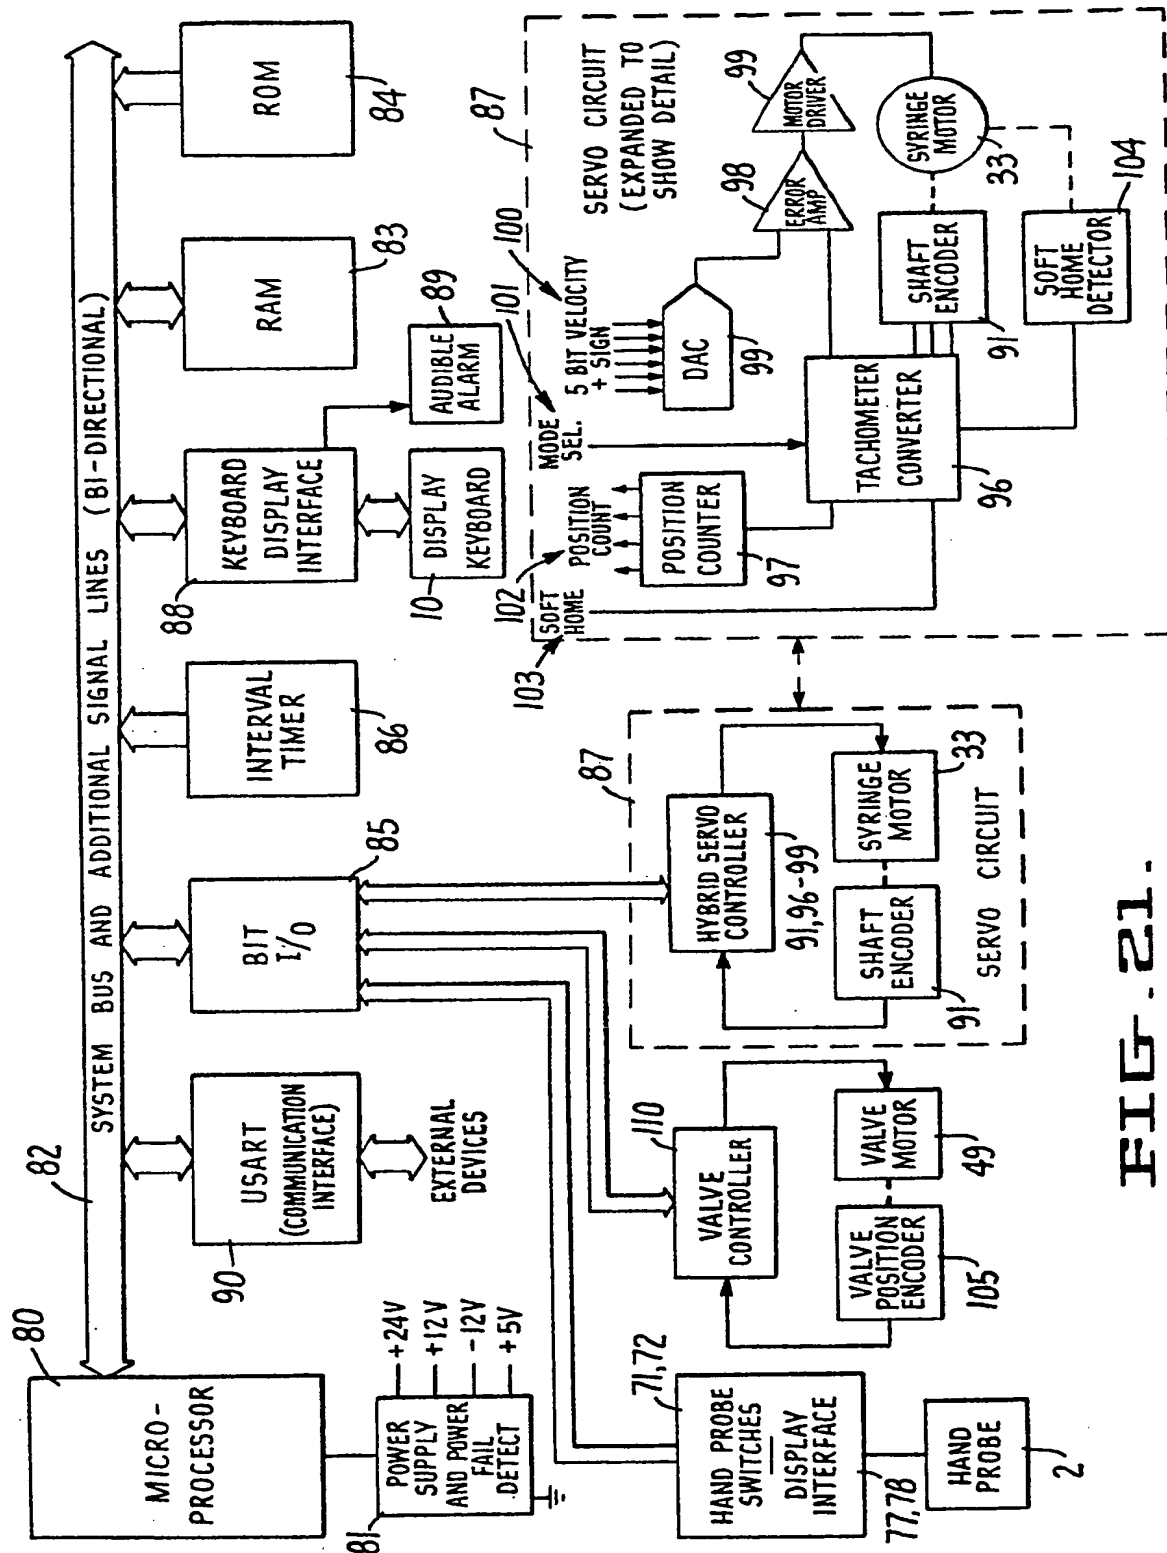


FIG. 21.

THIS PAGE BLANK (USPTO)

BASIC DOC.

(19)



European Patent Office
Office européen des brevets

(11) Publication number:

0 070 571
A3

(12)

EUROPEAN PATENT APPLICATION

(21) Application number: 82106587.7

(51) Int. Cl.⁴: B 01 L 3/02
G 01 N 1/00

(22) Date of filing: 21.07.82

(30) Priority 21.07.81 US 285516
31.08.81 US 297955
31.08.81 US 297956
31.08.81 US 297960

(43) Date of publication of application:
15.01.83 Bulletin 83/4

(88) Date of deferred publication of search report: 25.09.85

(84) Designated Contracting States:
AT BE CH DE FR GB IT LI NL SE

(71) Applicant: Scientific Manufacturing Industries Inc.
1399 64th Street
Emeryville California(US)

(72) Inventor: Bilbrey, Robert A
12 Sanborn Road
Orianda California(US)

(72) Inventor: Koball, Bruce R.
6470 Vellejo Street
Emeryville, California 94608(US)

(72) Inventor: Loram, John S.H.
806 Camelia Street
Berkeley California(US)

(72) Inventor: Eckert, John F.
28 Forest Lane
San Rafael, California 94903(US)

(74) Representative: Baillie, Iain Cameron et al,
c/o Ladas & Parry Isartorplatz 5
D-8000 Munchen 2(DE)

(54) Automated liquid dispenser control.

(57) An automated liquid dispenser for dispensing reagents or diluting samples with reagent automatically with enhanced accuracy, precision and speed in accord with a programmed local microprocessor or remote computer control.

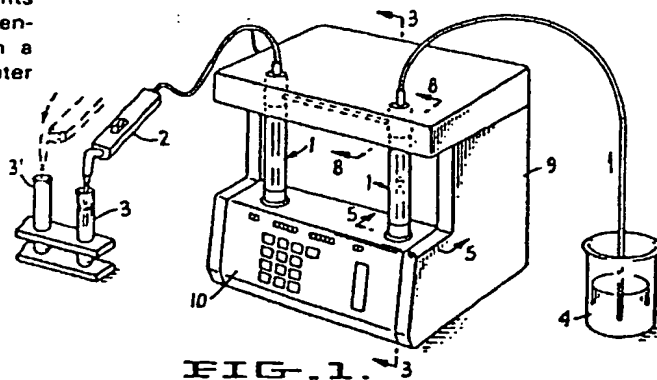


FIG. 1.

EP 0 070 571 A3

Best Available Copy



European Patent
Office

EUROPEAN SEARCH REPORT

0070571

Application number

EP 82 10 6587

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl. 3)
X	CHEMICAL PROCESSING, vol. 13, no. 10, October 1967, pages 44/45, London, GB; "Precision pulse burette for macro and micro volumetric work" * The whole article *	1	B 01 L 3/02 G 01 N 1/00
A	--- IDEM.	8, 11, 12	
X	--- US-A-3 780 912 (SANZ) * Column 3, line 52 - column 7, line 25; column 8, line 40 - column 9, line 30 *	5, 6	
Y		1	
A		15, 18	TECHNICAL FIELDS SEARCHED (Int. Cl. 3)
Y	--- EP-A-O 019 579 (CIBA-GEIGY AG) * Page 3, line 12 - page 5, line 15 *	1, 11	B 01 L G 01 N
A	--- -/-	8	
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 10-05-1985	Examiner VAN OORSCHOT J.W.M.
CATEGORY OF CITED DOCUMENTS		T theory or principle underlying the invention E earlier patent document, but published on, or after the filing date C document cited in the application L document cited for other reasons 6 member of the same patent family, corresponding document	
X	particularly relevant if taken alone		
Y	particularly relevant if combined with another document of the same category		
A	technological background		
O	non-written disclosure		
P	intermediate document		

Best Available Copy



DOCUMENTS CONSIDERED TO BE RELEVANT			Page 2												
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl. 3)												
X	EP-A-0 025 575 (CLINICON INTERNATIONAL GmbH) * Page 12, line 21 - page 15, line 15; page 17, line 8 - page 18, line 10; page 20, line 27 - page 23; line 15; page 24, line 31 - page 25, line 7 *	8, 9, 10													
Y		11													
A	* Page 17, line 8 - page 18, line 10 *	13													
A	--- US-E- 29 495 (GEORGI) * Claim 1; column 9, line 67 - column 10, line 10; column 4, lines 15-20 *	8, 12, 14													
A	--- AUTOMATIE, vol. 15, no. 2, February 1971, pages 45-49, Baarn, NL; "TESTRAPPORT: doseeren verdunningsapparaat van Ahrend" * Page 45, lines 9-68 *	1, 18, 19													
A	--- US-A-3 701 345 (HEILMAN et al.) * Claim 1; column 20, lines 32-36 *	8, 12	TECHNICAL FIELDS SEARCHED (Int. Cl. 3)												
The present search report has been drawn up for all claims															
Place of search THE HAGUE		Date of completion of the search 10-05-1985	Examiner VAN OORSCHOT J.W.M.												
<table border="0"><tr><td>CATEGORY OF CITED DOCUMENTS</td><td>T : theory or principle underlying the invention</td></tr><tr><td>X : particularly relevant if taken alone</td><td>E : earlier patent document, but published on, or after the filing date</td></tr><tr><td>Y : particularly relevant if combined with another document of the same category</td><td>D : document cited in the application</td></tr><tr><td>A : technological background</td><td>L : document cited for other reasons</td></tr><tr><td>O : non-written disclosure</td><td></td></tr><tr><td>P : intermediate document</td><td>& : member of the same patent family, corresponding document</td></tr></table>				CATEGORY OF CITED DOCUMENTS	T : theory or principle underlying the invention	X : particularly relevant if taken alone	E : earlier patent document, but published on, or after the filing date	Y : particularly relevant if combined with another document of the same category	D : document cited in the application	A : technological background	L : document cited for other reasons	O : non-written disclosure		P : intermediate document	& : member of the same patent family, corresponding document
CATEGORY OF CITED DOCUMENTS	T : theory or principle underlying the invention														
X : particularly relevant if taken alone	E : earlier patent document, but published on, or after the filing date														
Y : particularly relevant if combined with another document of the same category	D : document cited in the application														
A : technological background	L : document cited for other reasons														
O : non-written disclosure															
P : intermediate document	& : member of the same patent family, corresponding document														

EPO Form 1503 03/87

Best Available Copy



European Patent
Office

EUROPEAN SEARCH REPORT

0070571

Application number

EP 82 10 6587

DOCUMENTS CONSIDERED TO BE RELEVANT			Page 3
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl. 3)
A	FR-A-2 358 651 (SUNDSTROM) * Page 3, line 39 - page 8, line 22 *	1, 8	
P, X	WO-A-8 103 476 (CHASE et al.) * Page 4, line 21 - page 12, line 19 * -----	1	
			TECHNICAL FIELDS SEARCHED (Int. Cl. 3)
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 10-05-1985	Examiner VAN OORSCHOT J.W.M.
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO Form 1503 03.82

Best Available Copy

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

THIS PAGE BLANK (USPTO)